


EC frameless 90 flat Ø90 mm, brushless, 260 watt

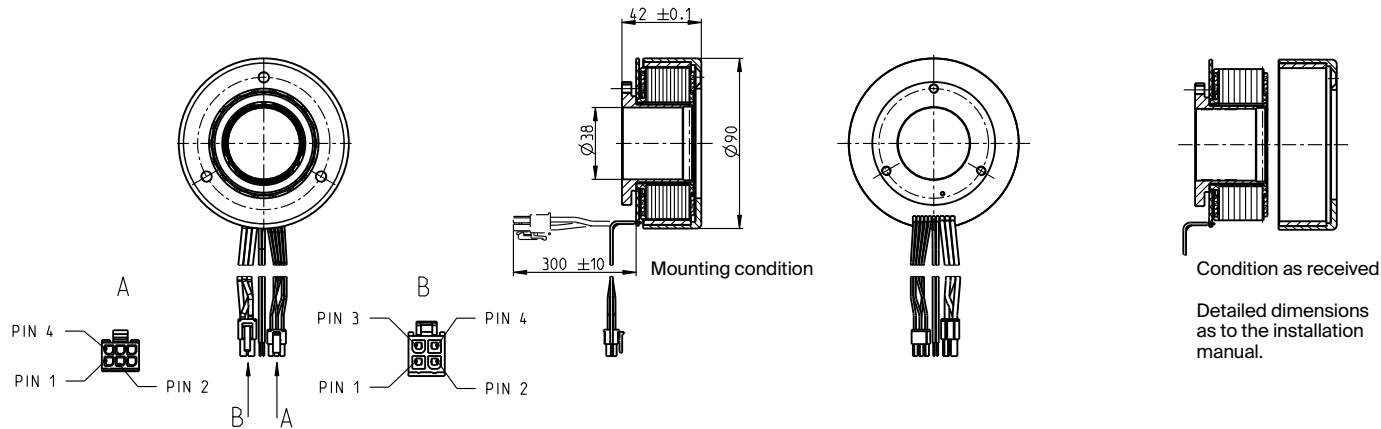


M 1:4

- Stock program
- Standard program
- Special program (on request)

Part numbers

|                                             | with Hall sensors | 588849 | 542099 | 581294 | 581295 |  |  |  |  |
|---------------------------------------------|-------------------|--------|--------|--------|--------|--|--|--|--|
| Motor data                                  |                   |        |        |        |        |  |  |  |  |
| Values at nominal voltage                   |                   |        |        |        |        |  |  |  |  |
| 1 Nominal voltage                           | V                 | 18     | 30     | 48     | 60     |  |  |  |  |
| 2 No load speed                             | rpm               | 2100   | 2080   | 1960   | 1980   |  |  |  |  |
| 3 No load current                           | mA                | 830    | 490    | 278    | 227    |  |  |  |  |
| 4 Nominal speed                             | rpm               | 1770   | 1770   | 1660   | 1690   |  |  |  |  |
| 5 Nominal torque                            | mNm               | 1010   | 988    | 964    | 963    |  |  |  |  |
| 6 Nominal current (max. continuous current) | A                 | 12.1   | 7.06   | 4.06   | 3.28   |  |  |  |  |
| 7 Stall torque                              | mNm               | 13400  | 14100  | 13000  | 13200  |  |  |  |  |
| 8 Stall current                             | A                 | 166    | 103    | 56.2   | 46.3   |  |  |  |  |
| 9 Max. efficiency                           | %                 | 86     | 87     | 86     | 86     |  |  |  |  |
| Characteristics                             |                   |        |        |        |        |  |  |  |  |
| 10 Terminal resistance phase to phase       | Ω                 | 0.109  | 0.29   | 0.854  | 1.29   |  |  |  |  |
| 11 Terminal inductance phase to phase       | mH                | 0.133  | 0.369  | 1.07   | 1.63   |  |  |  |  |
| 12 Torque constant                          | mNm/A             | 80.7   | 136    | 231    | 286    |  |  |  |  |
| 13 Speed constant                           | rpm/V             | 118    | 70.2   | 41.3   | 33.4   |  |  |  |  |
| 14 Speed/torque gradient                    | rpm/mNm           | 0.159  | 0.15   | 0.153  | 0.152  |  |  |  |  |
| 15 Mechanical time constant                 | ms                | 8.85   | 8.32   | 8.47   | 8.41   |  |  |  |  |
| 16 Rotor inertia                            | gcm <sup>2</sup>  | 5300   | 5300   | 5300   | 5300   |  |  |  |  |

| Specifications                        | Operating range | Comments |
|---------------------------------------|-----------------|----------|
| <b>Thermal data</b>                   | <b>n [rpm]</b>  |          |
| 17 Thermal resistance housing-ambient | 1.74 K/W        |          |
| 18 Thermal resistance winding-housing | 1.82 K/W        |          |
| 19 Thermal time constant winding      | 60.5 s          |          |
| 20 Thermal time constant motor        | 258 s           |          |
| 21 Ambient temperature                | -40...+100°C    |          |
| 22 Max. winding temperature           | +125°C          |          |
| <b>Mechanical data</b>                |                 |          |
| 23 Max. speed                         | 5000 rpm        |          |
| <b>Other specifications</b>           |                 |          |
| 29 Number of pole pairs               | 11              |          |
| 30 Number of phases                   | 3               |          |
| 31 Weight of motor                    | 814 g           |          |
| Weight of rotor                       | 292 g           |          |
| Weight of stator                      | 522 g           |          |

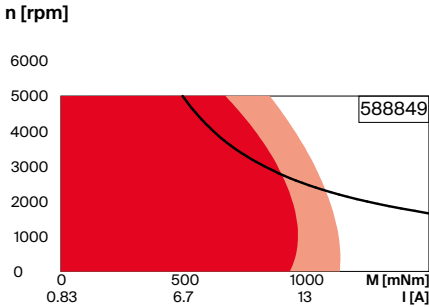

- Continuous operation
- Continuous operation with reduced thermal resistance  $R_{th2}$  50%
- Intermittent operation
- Assigned power rating

Values listed in the table are nominal.

**Connection motor** (Cable AWG 16)  
red Motor winding 1 Pin 1  
black Motor winding 2 Pin 2  
white Motor winding 3 Pin 3  
N.C. Pin 4

**Connector** Part number  
Molex 39-01-2040

**Connection sensors** (Cable AWG 24)  
yellow Hall sensor 1 Pin 1  
brown Hall sensor 2 Pin 2  
grey Hall sensor 3 Pin 3  
blue GND Pin 4  
green  $V_{Hall}$  4.5...24 VDC Pin 5  
N.C. Pin 6

**Connector** Part number  
Molex 43025-0600  
Wiring diagram for Hall sensors see p. 69

**Connection NTC** (Cable AWG 24)  
pink NTC  
blue NTC

Resistance 25°C: 5 kΩ ±1%, beta (25–85°C): 3490 K

Modular system

Details on catalog page 56

**Motor Control**  
547\_DEC Module 50/5  
551\_ESCON Module 50/4 EC-S  
551\_ESCON Module 50/5  
552\_ESCON Module 50/8 HE  
553\_ESCON 50/5  
553\_ESCON 70/10  
557\_ESCON2 Micro 60/5  
558\_ESCON2 Module 60/12  
559\_ESCON2 Compact 60/12  
564\_EPOS4 Module 50/5  
565\_EPOS4 Module 50/8  
565\_EPOS4 Module 50/15  
567\_EPOS4 Compact 50/5  
567\_EPOS4 Compact 50/8  
568\_EPOS4 Compact 50/15  
569\_EPOS4 50/5  
569\_EPOS4 70/15  
571\_EPOS4 Disk 60/12